





Davenport Lift Control

Anti-Surf Device Without Alarm

Tel 020 8504 8286

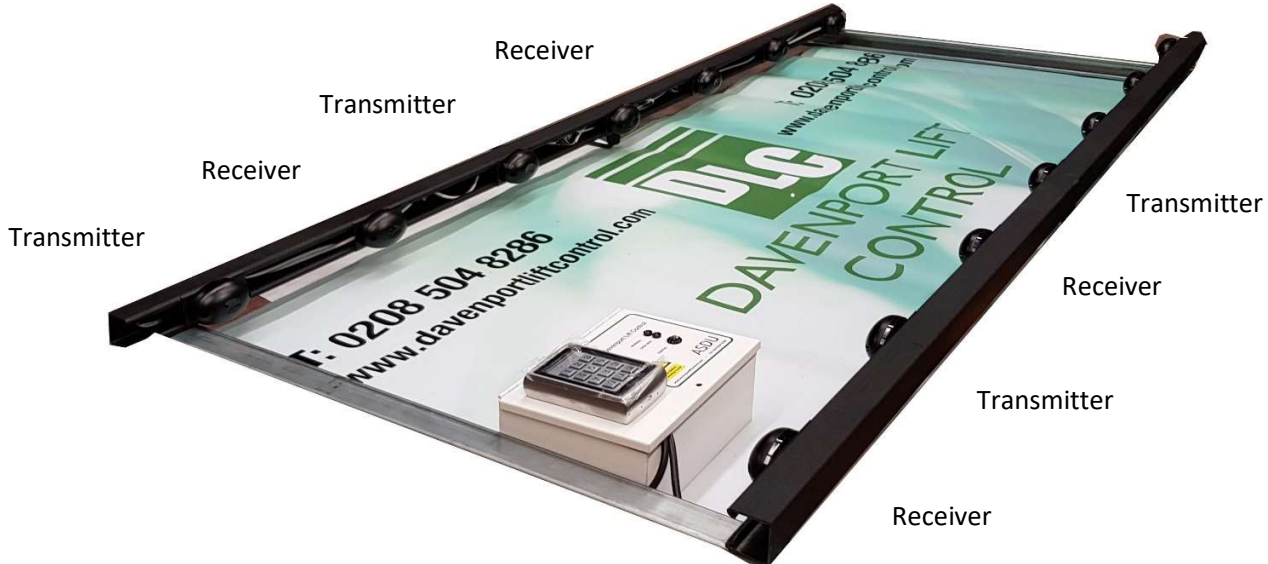

The Anti Surf Device comes in a standard-length of 1900 mm. Because all lift cars are different the unit may need to be cut down in length. The transmitters and receivers can be removed in pairs. It is important when adjusting the sensors, the minimum distance between them must be no less than 150mm. After all the sensors have been adjusted cut the lid and fit between sensors

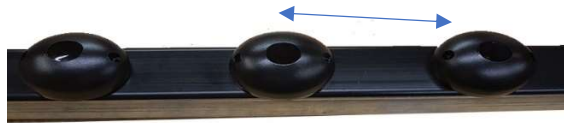

Once the system is switched on the green normal LED will light up, after 10 sec the unit will be set. When the unit is triggered the tripped large red LED will be on and the normal LED will go out, this will also trigger the sounder/beacon. The volt free contact pair will need to be connected to the safety circuit. To reset the lift enter the 4-digit access code default number [3579] this will put the unit into override mode, this mode will allow the engineer to work on the lift for 1-hour before returning to normal. Entering the code again within the 1- hour the unit will return to normal after 10 seconds.

