

B-LIFT 70

Lift light curtains with relay output and suitable for small installation spaces



MAIN FEATURES

- Size (WxDxH): 7x30x2000mm.
- Detecting Height: 20mm to 1850mm.
- Number of IR diodes: 32.
- Scan beams (distance > 400mm): 154 beams.
- Scan beams (distance < 400mm): 94 beams.
- Opening: 0mm - 4000mm.
- Ideal for both static and dynamic mounting.
- Light Immunity: 100,000 LUX.
- Operating Temperature: -20°C ~ +65°C.
- Buzzer: after continuous detection for 15s buzzer on (when BUZZER SWITCH=ON).
- Cable length: 3 mtr.
- Vandalism detection: 120 sec., 1 diode.
- Automasking function: 1260mm – 1850mm.
- Output: relay.
- IP: 54.

MODEL	POWER SUPPLY
B-LIFT SLIM-220	220 VAC
B-LIFT SLIM-12/24	12/24 VDC

FOCUS



UP TO 154 BEAMS




7 MM WIDTH



IDEAL FOR MODERNISATION



AUTOMASKING FUNCTION

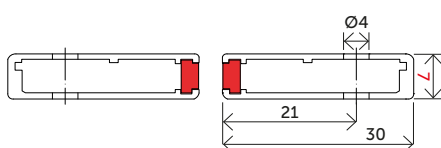

Mechanical profile

